

OFS-80 Series Optical Fiber Fusion Splicer

ShinewayTech® OFS-80 series optical fiber fusion splicer is designed with high-speed image processing technology and special precision-positioning technology, it automatically finishes the whole process of fiber fusion in 9 seconds typically, LCD monitor displays all steps of fiber fusion clear at a glance. Compatible with ITU-T SM/MM/DS/NZDS fiber, equipped with 250mm/900mm/Panda fiber holders and SOC adapter, OFS-80 series is your reliable fusion splicer for general-purpose optical network construction, FTTx and laboratory application.


Features

- ◆ Auto core alignment
- ◆ Excellent splicing result
- ◆ Applicable to SM/MM fibers
- ◆ Interchangeable fiber holders (250μm/900μm/Panda drop cable) and Splice-on connector (SOC) adapter
- ◆ Both X and Y axis display
- ◆ Fiber core can be displayed clearly
- ◆ Quick-removable battery pack with power indicator
- ◆ Inner light to set fiber in dark environment
- ◆ Auto check fiber end-face & splice loss calculation
- ◆ 9 seconds splice time and 30 seconds heat time / 3 hours fast recharge
- ◆ 60 preset/user-definable splicing programs
- ◆ Temperature and atmospheric pressure compensation function
- ◆ Arc power automatic optimization
- ◆ Built-in event counter with electrode change indication
- ◆ Splicing pause function and automatically resume when wind shield close
- ◆ Simple operation menu
- ◆ Exterior operation capability at rugged conditions
- ◆ Unique LCD screen transparent protection cover
- ◆ Sturdy weatherproof cover & Max. wind velocity of 15m/s
- ◆ Easy cleaning and maintenance



Interchangeable fiber holders & Splice-on connector (SOC) adapter

OFS-80E is engineered to work with interchangeable fiber holders which makes it easy for the operator to cleave and splice different types of fiber like 250 μ m, 900 μ m and Panda fiber anywhere in the network. OFS-80E also supports splice-on connectors (SOC) splicing for efficient FTTx deployment and maintenance.

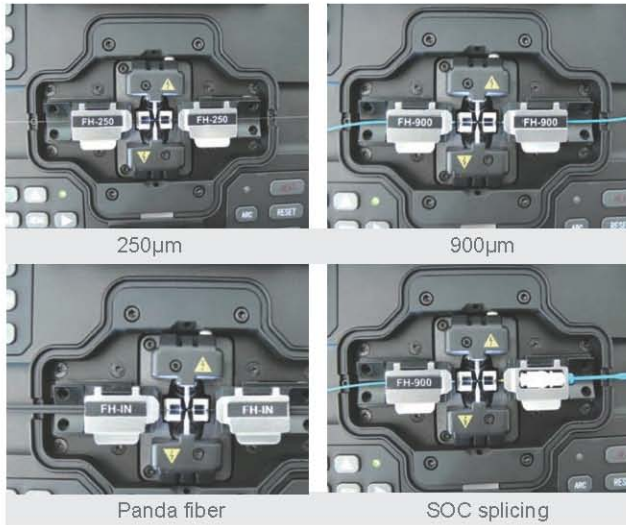

Sturdy multi-functional transporting case for field operation

- ◆ Complete protection of splicer
- ◆ Unique design of removable splicer holder on case top for stable operation
- ◆ Integrated tool box with cover on case top



Specifications

Model	OFS-80A	OFS-80E	OFS-80F
Application	General splicing	FTTx application 250/900µm/Bow-type compatible; Splice-on connector (SOC) adapter	General splicing FTTx application 250/Bow-type compatible;
Applicable Fibers	SM (ITU-T G.652), MM (ITU-T G.651), DS (ITU-T G.653), NZDS (ITU-T G.655), ITU-T G.657		
Fiber Cleaved Length	8~16mm (Coating diameter: 250µm) 16mm (Coating diameter: 250 ~ 1000µm)		
Cladding Diameter	80 ~150µm		
Coating Diameter	100 ~ 1000µm		
Fiber Count	Single		
Fiber Aligning Method	Auto core alignment		
Return Loss	>60dB		
Actual Average Splice Loss	0.02dB (SM), 0.01dB (MM), 0.04dB (DS), 0.04dB (NZDS)		
Splicing Mode	60 preset/user-definable modes		
Splicing Time	Typical 9 sec, with standard SM fiber		
Arc Calibration Mode	Automatic and manual		
Protection Sleeve Length	60mm, 40mm and a series of micro sleeves		
Storage Of Splice Result	5000 results		
Tension Test	2N		
Fiber Display/ Magnification	240X(X and Y view)		
Tube Heating Mode	Heating time adjustable: 1 – 240 sec		
Tube Heating Time	Typical 30 seconds		
Splicing/Heating Times	Typical 120 cycles (splicing/tube heat) with Li-battery only		
Display	5.7 inch color LCD monitor		
Connectivity	RS-232/USB		
Operating Condition	0 ~ 5000m above sea level; 0 to 95% RH; -10 to 50°C; Max. wind velocity of 15m/s		
Storage Condition	-20°C to + 70°C, 0 to 95% RH		
Power Supply	AC adapter (AC-input: 100-240V; DC-output:14.5-15V); Li-battery (6600mAh)		
Weight	3.15 Kg (including battery)		
Dimensions (H×W×T)	180x160x155mm		

* Specifications subject to change without notice

Ordering Information

Standard Package Includes:

OFS-80A/F	Instrument, Power supply module, AC power cord, Spare electrodes (one pair), Cooling tray, Screen cover, Carrying case, Warranty card, User manual.
OFS-80E	FH-250 holder, FH-900 holder, FH-IN holder, SOC holder; Instrument, Power supply module, AC power cord, Spare electrodes (one pair), Cooling tray, Screen cover, Carrying case, Warranty card, User manual.