


Features

- ➔ DC - 3000MHz
- ➔ 18.5 dB Gain at 0.9GHz
- ➔ +16 dBm P1dB
- ➔ +30 dBm Output IP3
- ➔ Single Voltage Supply
- ➔ Lead-free / Green / RoHS-compliant SOT-89 Package

Applications

- ➔ Broadband Gain Block
- ➔ Mobile Infrastructure
- ➔ Cellular, PCS, GSM, GPRS, WCDMA, WiBro
- ➔ W-LAN / DMB
- ➔ CATV / DBS
- ➔ RFID / Fixed Wireless

Functional Diagram



Function	Pin No.
RF IN	1
RF OUT / Bias	3
Ground	2,4

Description

The PW250 is a high performance InGaP HBT MMIC Amplifier and consists of Darlington pair amplifiers. The amplifier features high linear performance, wideband operation, and high reliability. The PW250 operates from a single voltage supply and requires only two DC-blocking capacitors, a bias resistor and an inductor for operation. The device is a general purpose buffer amplifier that offers high dynamic range in a low cost surface-mountable plastic SOT-89 packages.

Specifications


Symbol	Parameters	Units	Freq.	Min.	Typ.	Max.
S21	Gain	dB	75 MHz 900 MHz 1900 MHz 2300 MHz 2600 MHz		19 18.5 17.4 16.4 15.5	
S11	Input Return Loss	dB	75 MHz 900 MHz 1900 MHz 2300 MHz 2600 MHz		-17 -16 -20 -16 -15	
S22	Output Return Loss	dB	75 MHz 900 MHz 1900 MHz 2300 MHz 2600 MHz		-12 -17 -13 -11 -10	
P1dB	Output Power @1dB compression	dBm	75 MHz 900 MHz 1900 MHz 2300 MHz 2600 MHz		16.5 16.0 16.0 16.5 15.5	
OIP3	Output Third Order intercept	dBm	75 MHz 900 MHz 1900 MHz 2300 MHz 2600 MHz		30.5 30.0 30.0 29.5 28.5	
NF	Noise Figure	dB	75 MHz 900 MHz 1900 MHz 2300 MHz 2600 MHz		3.3 3.3 3.3 3.4 3.5	
V / I	Device voltage / current	V/mA			4.78/46	
Rth	Thermal Resistance	°C/W			77	

Test Conditions : T=25°C, Supply Voltage=+6V, Rbias=27ohm, 50ohm System, OIP3 measured with two tones at an output power of +0dBm/tone separated by 1MHz.


Typical RF Performance for 1.9GHz Tuned Application Circuit

Supply Bias Voltage = 6V, R(bias)= 27 ohm, Current= 46mA

Frequency	MHz	500	900	1500	1900	2300	2600	3000
S21	dB	18.5	18.5	18.0	17.4	16.4	15.6	14.9
S11	dB	-12	-16	-23	-20	-16	-15	-15
S22	dB	-11	-17	-17	-13	-11	-10	-10
P1dB	dBm	14.9	16.0	15.7	16.1	16.5	15.9	14.4
OIP3	dBm	28.8	30.2	30.7	30.6	29.6	28.6	27.8
Noise Figure	dB	3.3	3.3	3.3	3.3	3.4	3.5	3.7

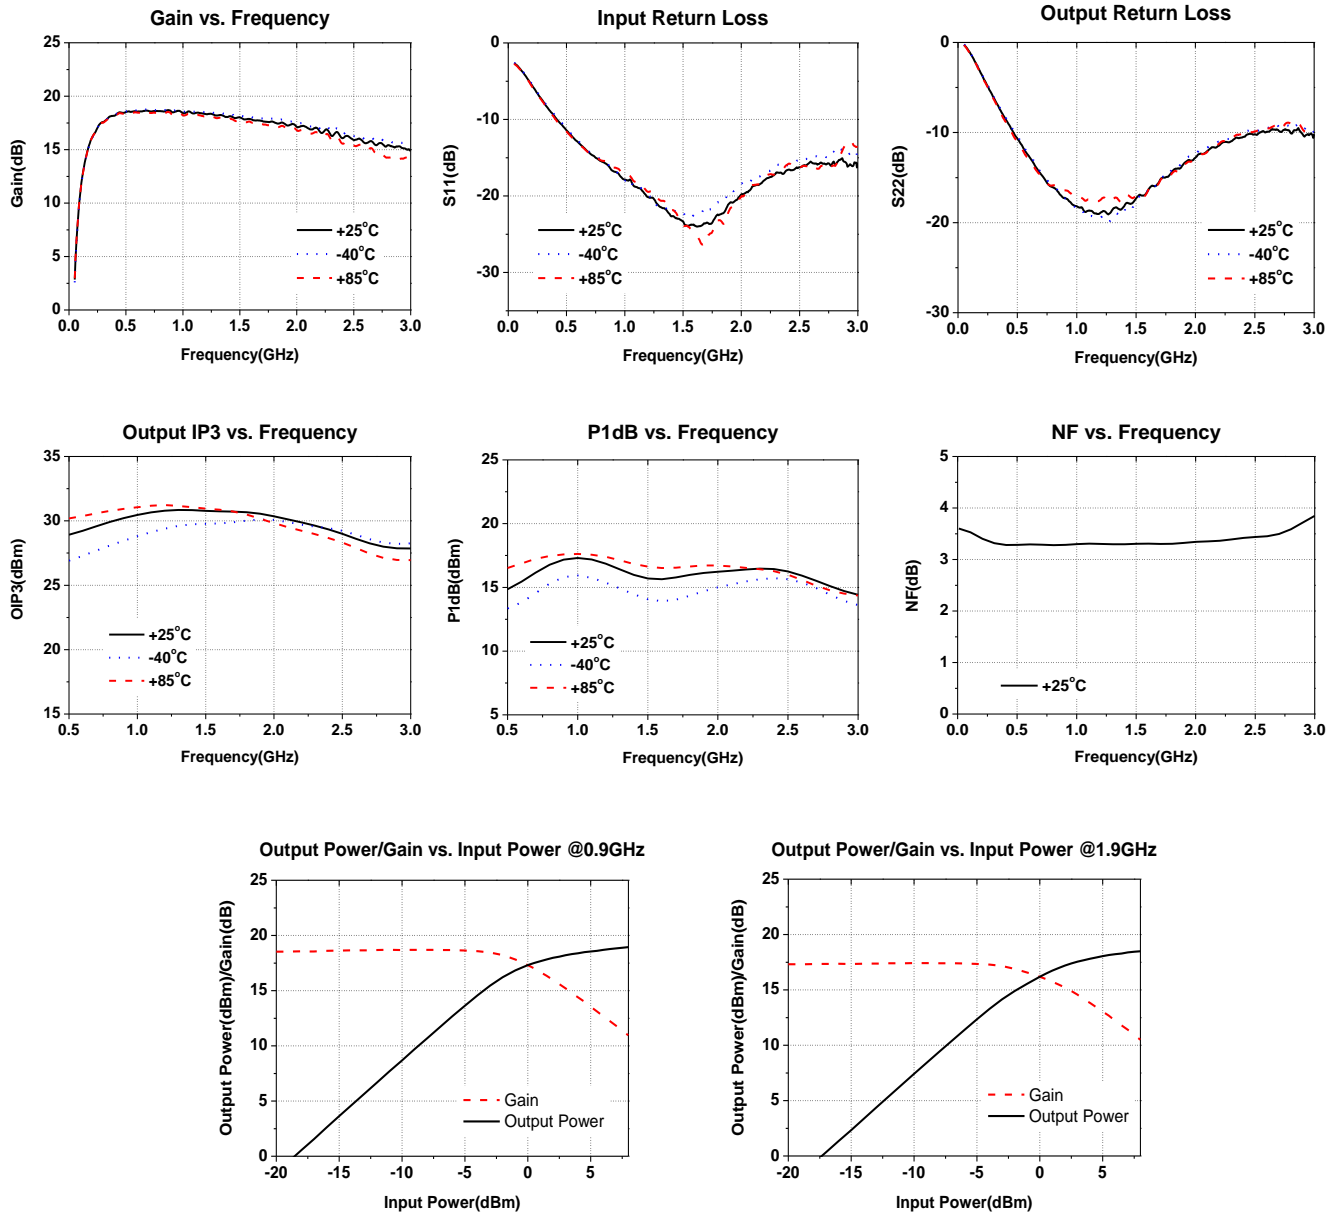

1.9GHz Tuned Application Circuit

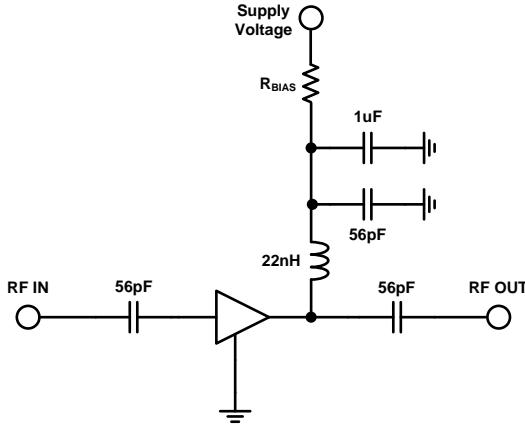


Recommended Bias Values

Supply Voltage	R bias Value	Size
5 V	5.1 Ω	0805
5.3 V	12 Ω	0805
6 V	27 Ω	0805
7 V	51 Ω	1210
8 V	71 Ω	1210
9 V	91 Ω	2010
10 V	113 Ω	2010
12 V	155 Ω	2512


Typical RF Performance for 50 - 500MHz Tuned Application Circuit

Supply Bias Voltage = 6V, R(bias)= 27 ohm, Current=46mA


Frequency	MHz	75	125	300	500
S21 : Gain	dB	19.0	18.9	18.7	18.6
S11 : Input Return Loss	dB	-17	-18	-17	-17
S22 : Output Return Loss	dB	-12	-13	-13	-12
Output P1dB	dBm	16.5	16.7	16.5	16.3
Output IP3 @0dBm	dBm	30.5	30.5	30.3	29.5
Noise Figure	dB	3.3	3.3	3.4	3.4

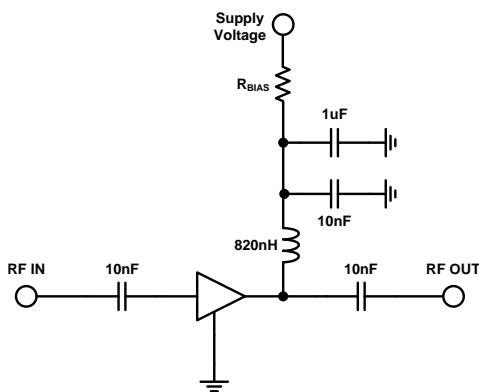


Gain vs. Frequency

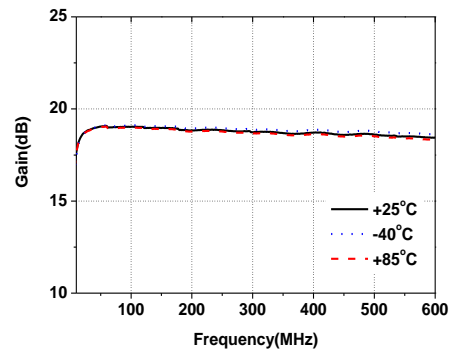

Input Return Loss

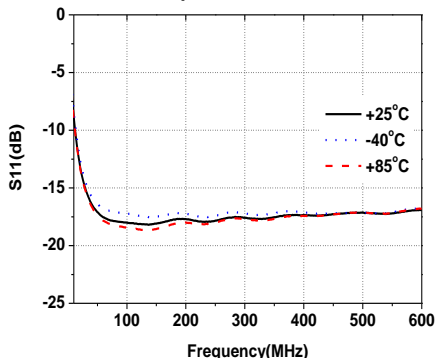




Output Return Loss

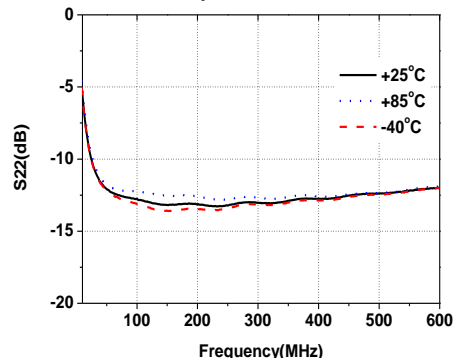

Typical RF Performance for 3.5GHz Tuned Application Circuit

Frequency	3500MHz
S21 : Gain	15.2 dB
S11 : Input Return Loss	-13 dB
S22 : Output Return Loss	-12 dB
Output P1dB	14.4 dBm
Output IP3 @ 0dBm	26.5 dBm
Supply Voltage	6 V
Current	45 mA




Test Board Information : Rogers 4350B PCB
(Dielectric Constant = 3.48, thick = 0.8mm(32mil))

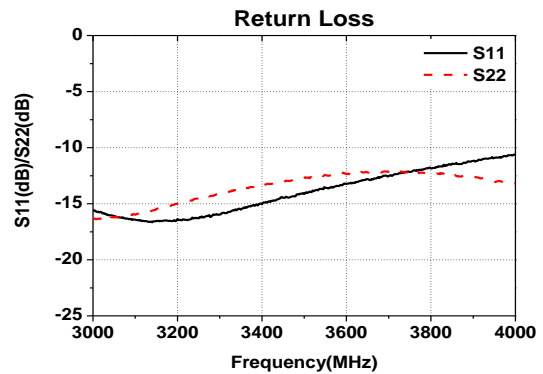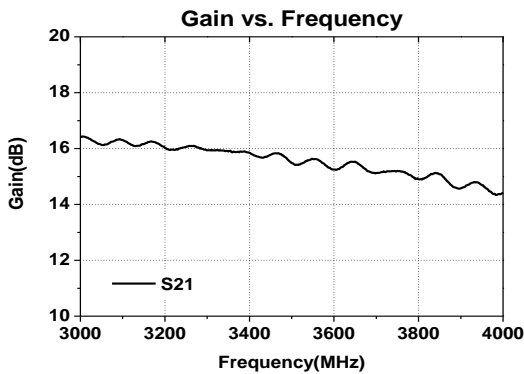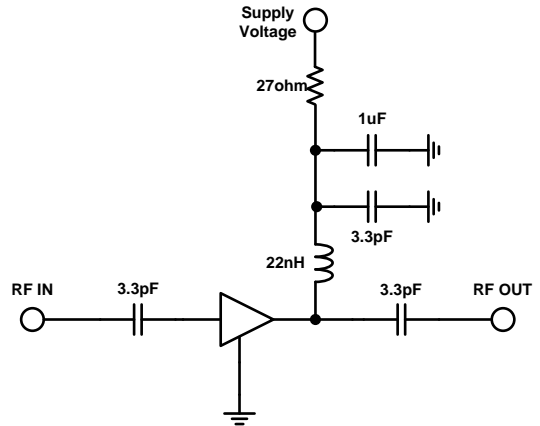

Typical RF Performance for 5.8GHz Tuned Application Circuit

Frequency	5800MHz
S21 : Gain	12.7 dB
S11 : Input Return Loss	-15 dB
S22 : Output Return Loss	-10 dB
Output P1dB	10.5 dBm
Output IP3 @ -3dBm	23.5 dBm
Supply Voltage	6 V
Current	45 mA

Test Board Information : Rogers 4350B PCB
(Dielectric Constant = 3.48, thick = 0.8mm(32mil))

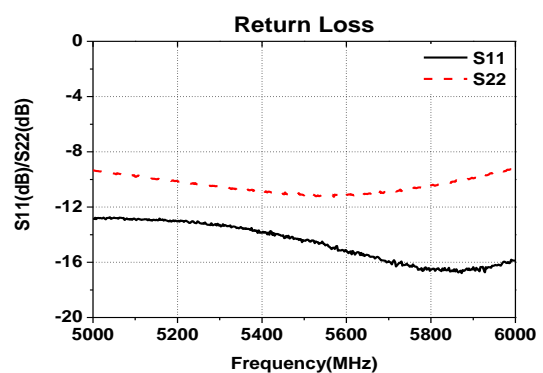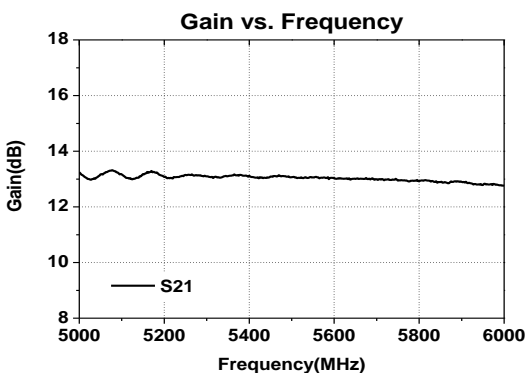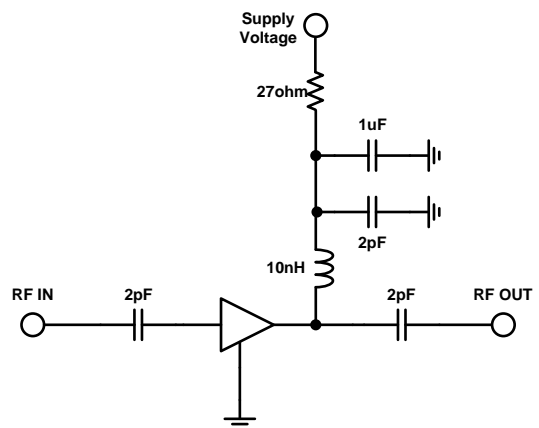


Absolute Maximum Ratings


Parameter	Rating	Unit
Supply Voltage	+7	V
Supply Current	150	mA
RF Power Input	10	dBm
Storage Temperature	-55 to +125	°C
Ambient Operating Temperature	-40 to +85	°C
Junction Temperature for >106 hours MTTF	187	°C

Operation of this device above any of these parameters may cause permanent damage.

Lead-free /RoHS Compliant / Green SOT-89 Package Outline

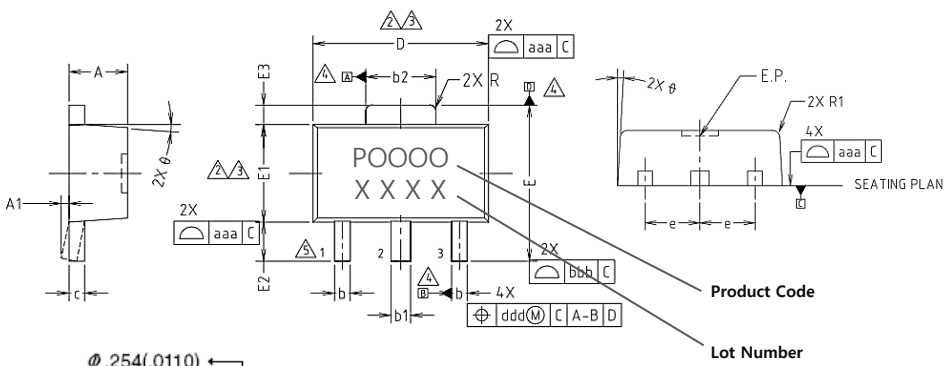

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	1.40	1.50	1.60	
A1	0.00	—	0.10	
b	0.38	0.42	0.48	
b1	0.48	0.52	0.58	
b2	1.79	1.82	1.87	
c	0.40	0.42	0.46	
D	4.40	4.50	4.70	2,3
E	3.70	4.00	4.30	
E1	2.40	2.50	2.70	2,3
E2	0.80	1.00	1.20	
E3	0.40	0.50	0.60	
e	1.50 TYP.			
φ	4° TYP.			
R	0.15 TYP.			
R1	—	—	0.20	
SYMBOL	TOLERANCES OF FORM AND POSITION		NOTE	
aaa	0.15			
bbb	0.20			
ccc	0.10			
ddd	0.10			

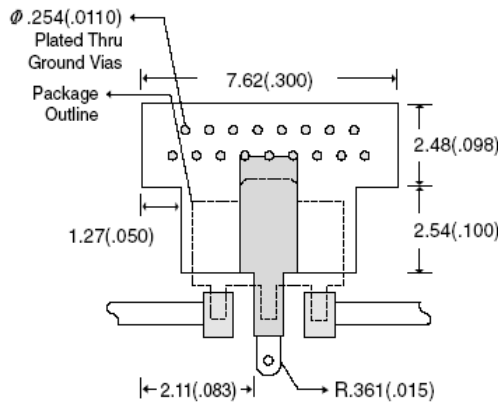


Product Code
Lot Number

ESD / MSL Ratings

1. ESD sensitive device. Observe Handling Precautions.
2. ESD Rating : Class 2(Passes at 2000V min.) Human Body Model (HBM), JESD22-A114
3. ESD Rating : Class IV (Passes at 1000V min.) Charged Device Model (CDM), JESD22-C101
4. MSL (Moisture Sensitive Level) Rating : Level 1 at +260°C Convection reflow, J-STD-020

Evaluation Board Layout (4x4)

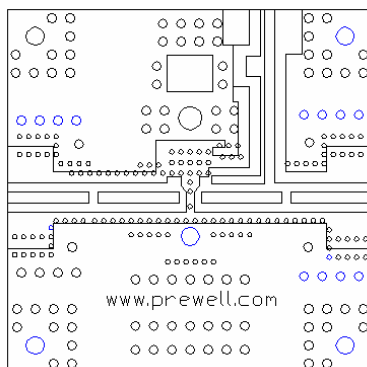

Mounting Instructions

1. Use a large ground pad area with many plated through-holes as shown.
2. We recommend 1 oz copper minimum.
3. Measurement for our data sheet was made on 0.8mm thick FR-4 Board.
4. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
5. RF trace width depends on the board material and construction.
6. Add mounting screws near the part to fasten the board to a heatsink.

<http://www.prewell.com>