

Series VH7

7.0x5.0 mm SMD High Precision Voltage Controlled




FEATURE

- Typical 7.0x5.0x1.85 mm ceramic SMD package.
- High Precision for -40°C~+85°C, ±0.28ppm
- CMOS and Clipped Sine wave (without DC-cut capacitor) output optional


APPLICATION

- Femtocell, Base Stations
- WLAN/WiMAX/WiFi, Wireless Communications
- Mobile Phone




RoHS Compliant Standard

DIMENSION (mm)

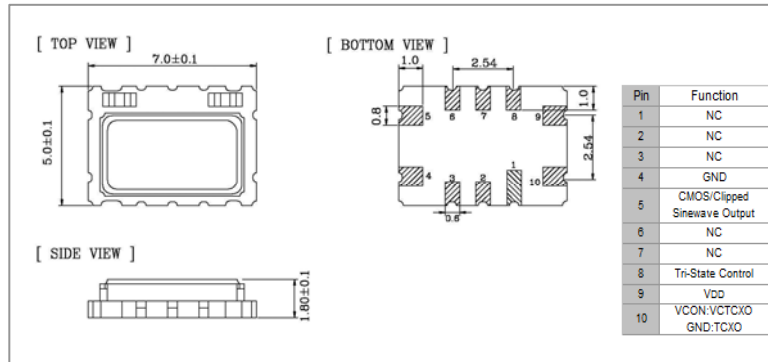

SOLDER PAD LAYOUT(mm)

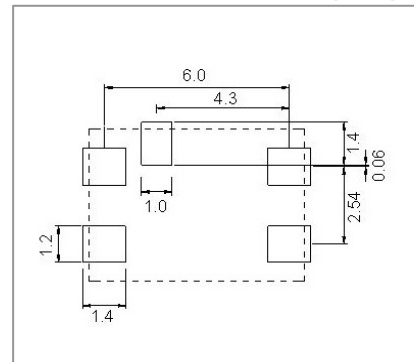

ELECTRICAL SPECIFICATION

Parameter	5.0V		3.3V		Unit
	Min.	Max	Min.	Max.	
Supply Voltage Variation (VDD) 5%	4.75	5.25	3.135	3.465	V
Frequency Range	5	40	5	40	MHz
Standard Frequency (for CMOS)	5, 6.4, 8, 8.192, 10, 12.5, 12.8, 16, 16.384, 19.44, 25				
Standard Frequency (for Clipped Sine)	8.192, 10, 12.5, 12.8, 16, 16.384, 19.44, 25				
Frequency Tolerance*	-	±2.0	-	±2.0	ppm
Frequency Stability					
Vs Supply Voltage (±5%) change	-	±0.5	-	±0.5	ppm
Vs Load (±10%) change	-	±0.2	-	±0.2	
Vs Aging	-	±1.0	-	±1.0	
Supply Current (CMOS output)	-	6	-	6	mA
Supply Current (Clipped Sine Wave)	-	3.5	-	3.5	
Output Level (CMOS)					V
Output High (Logic "1")	90%VDD	-	90%VDD	-	
Output Low (Logic "0")	-	10%VDD	-	10%VDD	
Duty	45	55	45	55	%
Output Level (Clipped Sine Wave)	0.8	-	0.8	-	Vp-p
Load (CMOS)	15pF		15pF		
Load (Clipped Sine Wave)	10KΩ/10pF		10KΩ/10pF		
Control Voltage Range (VCTCXO)	0.5	2.5	0.5	2.5	V
Pulling Range (VCTCXO)	±5.0	±12.0	±5.0	±12.0	ppm
Vc Input Impedance (VCTCXO)	100	-	100	-	KΩ
Phase Noise @ 12.8 MHz					dBc / Hz
100 Hz	-120	-	-120	-	
1 KHz	-140	-	-140	-	
10 KHz	-148	-	-148	-	
Start Time	-	2	-	2	mSec
Tri-State					V
Disable	-	0.3VDD	-	0.3VDD	
Enable	0.7VDD	-	0.7VDD	-	
Storage Temp. Range	-55	125	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position

*Frequency at 25 °C, 1 hour after reflow

Packing: Tape & Reel 1000/3000 pcs per Reel.

FREQ. STABILITY vs. TEMP. RANGE

Temp (°C)	ppm	±0.05	±0.1	±0.14	±0.28	±0.37	±0.5
0~+55		○	○	○	○	○	○
-10~+60		○	○	○	○	○	○
-20~+70		△	○	○	○	○	○
-40~+85		X	X	X	○	○	○

* O: Standard △: Available (case by case) X: Not available

Series VH7

7.0x5.0 mm SMD High Precision Voltage Controlled



Specifications subject to change without notice

Rev(3)06/2013